

Scrape separator (with high magnetic plate)  
**刮板分離機 (附磁板)**

● **適用機械** Application:

1. CNC綜合加工機 2. 滾齒機 3. 拉床
4. 專用機 5. 鑽床 6. CNC車床
7. 深孔鑽床 8. 各式磨床 9. 刮齒機
1. CNC machining center 2. Hobbing machine
3. Broaching machine 4. Special purpose machine
5. Drilling 6. CNC Lathe 7. Deep Hole Drilling machine
8. Grinding machine 9. Shaving machine

Much more than a conveyor  
**不只是搬運機**



**Equipped with torque limiter**

When overloading, the spindle will slip to protect conveyor chain.

● **設有扭力控制器**

當有過負荷情形時，  
主軸會打滑以保護  
輸送鏈條。



● **使用實例**

● **優越的過濾效果**

淨水出口兩側設有擋板，  
以確保漂浮污物不會流至  
乾淨水桶，並以磁板吸住  
鐵屑，以確保污物被刮板  
刮離排出。

**Excellent filtration effect:**

There are shields installed on both sides of the clean outlet. In order to prevent floating sludge from flowing into clean tank, the chips will be attracted by high magnetic plate, scrape by scraper and discharge.


**SCH360-1800**

## ● 特點

1. 兼可水平輸送及斜度輸送兩種功能。
2. 針對可吸磁的100mm以下斷屑，以刮板排除，尤適合鑄鐵有斷屑及石墨等難以處理之材料。
3. 污液受下方的強力磁板作過濾，清淨液往上流出至乾淨水桶，再以泵浦打至機械使用。
4. 設有扭力控制器，當有過負荷情形時主軸會打滑以保護輸送鏈條。




## Dimension 外型尺寸圖

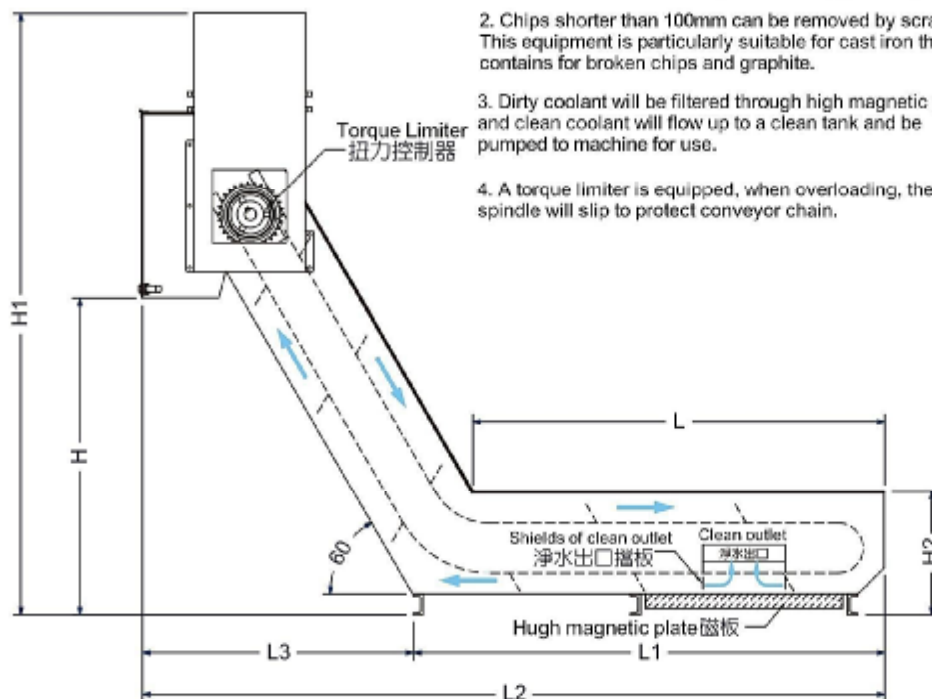

### FEATURES:

1. Two functions: horizontally and slantingly convey.
2. Chips shorter than 100mm can be removed by scraper. This equipment is particularly suitable for cast iron that contains for broken chips and graphite.
3. Dirty coolant will be filtered through high magnetic plate, and clean coolant will flow up to a clean tank and be pumped to machine for use.
4. A torque limiter is equipped, when overloading, the spindle will slip to protect conveyor chain.

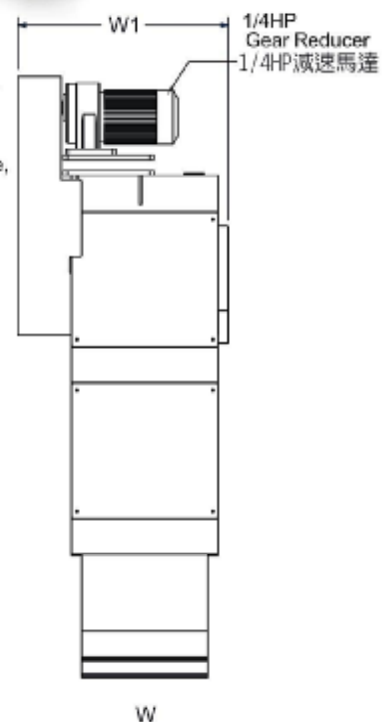

## 刮板分離機(附磁板)規格尺寸表 SPECIFICATIONS

型式Model	處理流量 Flow rate	刮運速度 Velocity(M/min)	馬達 Motor	比速 Ratio	L	L1	L2	L3	H	H1	H2	W	W1
SCH-260	200 L/M	1.9米/分 M/min	1/4 HP	1/200	1000	1144	1800	656	770	1456	300	256	411
					1500	1654	2300						
SCH-360	300 L/M	1.9米/分 M/min	1/4 HP	1/200	1000	1144	1800	656	770	1456	300	356	511
					1500	1654	2300						
SCH-460	400 L/M	1.9米/分 M/min	1/4 HP	1/200	1000	1144	1800	656	770	1467	300	456	611
					1500	1654	2300						
SCH-560	500 L/M	1.9米/分 M/min	1/4 HP	1/200	1000	1144	1800	656	770	1467	300	556	711
					1500	1654	2300						

- 註：1. 特殊寬度(W)，平行長(L)，排屑口高度(H)可依客戶尺寸訂做。For W, L and H, we could make as customer's specification.  
 2. 搬運量可因速度提高而加大。Velocity (M/min) can be increased by increasing the RPM of gear reducer.  
 3. 下方磁板可改用希士強力磁鐵而增加過濾效果，型號後加 HK。The material of high magnetic plate can be substituted for Rare Earth magnet in order to increase the filtration effect. The model number should be SCH-xxxHK.



源利電磁工業股份有限公司

彰化縣鹿港鎮彰濱工業區工業西六路23號

UNI MAGNETIC INDUSTRIAL CO., LTD.

NO. 23, GONGYE W. 6TH RD. LUKANG TOWN, CHANGHUA HSIEN 50544, TAIWAN

TEL: (04) 7810900

FAX: +886 - 4 - 7810901

http: //www.unimag.com.tw

E-mail: unicoltd@ms26.hinet.net

091031-1000



ISO 9001  
FM 518819