




MAGNETIC ROLLER CONVEYOR

APPLICATION

1. Separate and convey the ferrous chips.
 - (a) The long chips of Lathe and Driller.
 - (b) The short, thin chips of Gear cutting machine and Broaching.
 - (c) The long, short and thin chips of Deep hole drilling machine.
 - (d) The long, short and thin chips of special purpose machine.
2. Convey the waste materials of Punching.
3. Applicable to the long cutting and small cutting powder.

RCM60-14


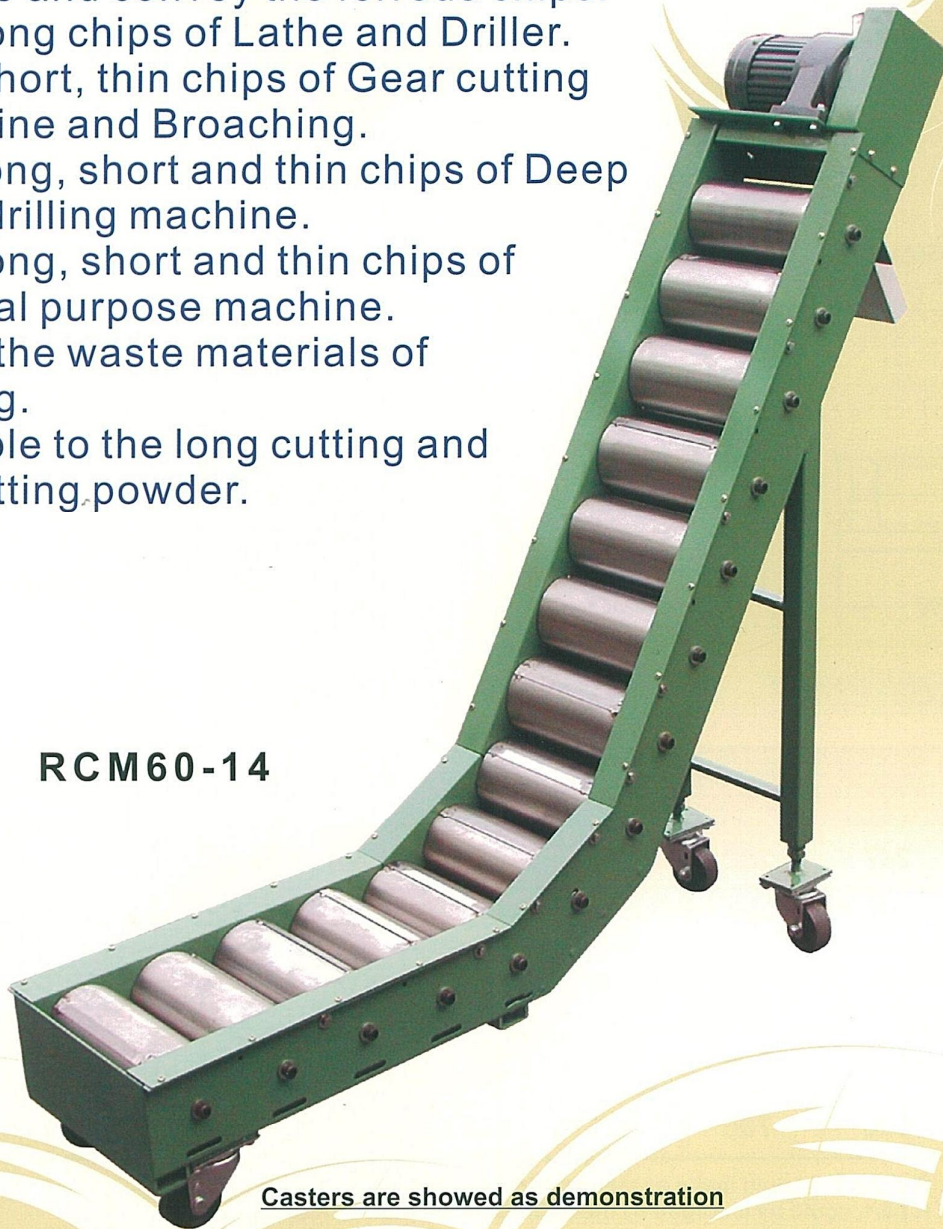


Casters are showed as demonstration

FEATURES:

1. To filter the cutting coolant, increase the quality of production.
2. Decreasing the frequency of changing coolant, save the expense.
3. Reducing the grease rate of cutting chips and the second handle expense.
4. It could convey both long and short chips, not like tradition as:
 - Long chips for hinged chip conveyor; short chips for scraper separator.
 - Magnetic roller conveyor contains these two functions so that it could save the equipment expense and install space.

DIMENSION

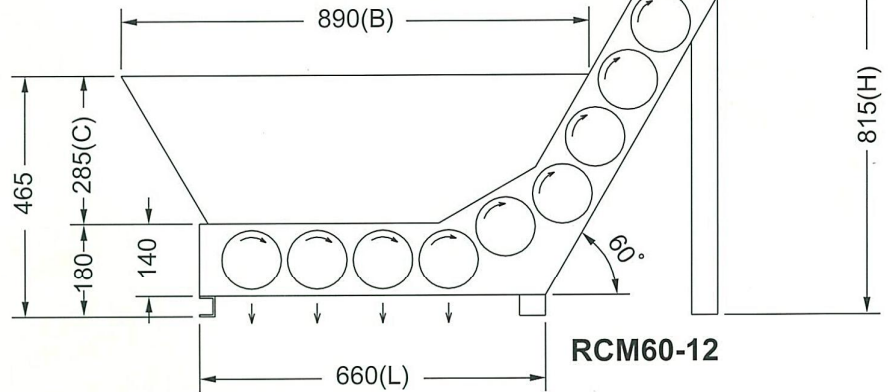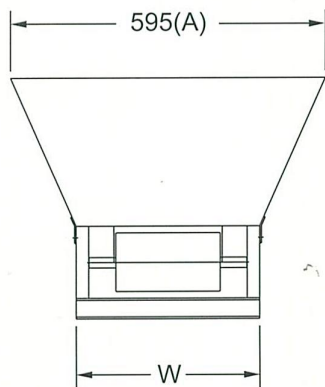

SPECIFICATIONS

MODEL	RCM10	RCM20	RCM40	RCM60	RCM80	RCM120	RCM150	RCM180	RCM240
W	247	282	317	352	387	457	527	597	737
FLOW RATE L/min/Roller	10	20	40	60	80	120	150	180	240
MOTOR REDUCER RATON	100W 1/200	100W 1/200	100W 1/200	100W 1/200	100W 1/200	100W 1/200	100W 1/200	100W 1/200	100W 1/200
VELOCITY M/min	3~4	3~4	3~4	3~4	3~4	3~4	3~4	3~4	3~4
HANDLE WEIGHT kg/H	500	700	825	1000	1200	1525	1875	2225	3000

NOTES: 1. For A, B, C part, it could make as customer's specification.
 2. For L, H part, could be changed by the quantity of rollers.



UNI MAGNETIC INDUSTRIAL CO., LTD.

No 23, Gongye West 6th Rd, Lukang Town,
 Chang hua Hsien Taiwan R. O. C

TEL: 886 - 4 - 7810900
 FAX : 886 - 4 - 7810901
[http : //www.unimag.com.tw](http://www.unimag.com.tw)
 E-mail : unicold@ms26.hinet.net